

High temperature accelerometer

HT787A-KCF





SPECIFICATIONS

Sensitivity, $\pm 5\%$, 25°C		100 mV/g	
Acceleration range, VDC > 25 V		80 g peak	
Amplitude nonlinearity		1%	
Frequency response:	$\pm 10\%$	1.0 - 5,000 Hz	
	± 3 dB	0.5 - 10,000 Hz	
Resonance frequency, nominal		22 kHz	
Transverse sensitivity, max		5% of axial	
Temperature response:	-25°C	-10%	
	+150°C	+15%	
Power requirement:			
Voltage source		18 - 30 VDC	
Current regulating diode		2 - 10 mA	
Electrical noise, equiv. g:			
Broadband	2.5 Hz to 25 kHz	25°C	150°C
		700 μ g	1,100 μ g
Spectral	10 Hz	10 μ g/ $\sqrt{\text{Hz}}$	14 μ g/ $\sqrt{\text{Hz}}$
		100 Hz	5 μ g/ $\sqrt{\text{Hz}}$
	1,000 Hz	5 μ g/ $\sqrt{\text{Hz}}$	7 μ g/ $\sqrt{\text{Hz}}$
Output impedance, max		100 Ω	
Bias output voltage:	+25°C	13 VDC	
	+150°C	12 VDC	
Grounding		case isolated, internally shielded	
Temperature range ¹		-50° to +165°C	
Vibration limit		500 g peak	
Shock limit		5,000 g peak	
Electromagnetic sensitivity, equiv. g, max		70 μ g/gauss	
Sealing		hermetic	
Base strain sensitivity, max		0.0002 g/ μ strain	
Sensing element design		PZT, shear	
Weight		145 grams	
Case material		316L stainless steel	
Mounting		1/4-28 captive screw	
Output connector		2 pin, MIL-5015 style	
Recommended cabling		J9F / J9T2A	




Key features

- Operation in environments up to 165°C
- Built with extended range components for long-lasting operation
- Manufactured in ISO 9001 facility

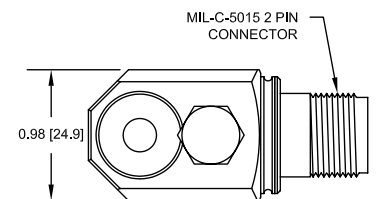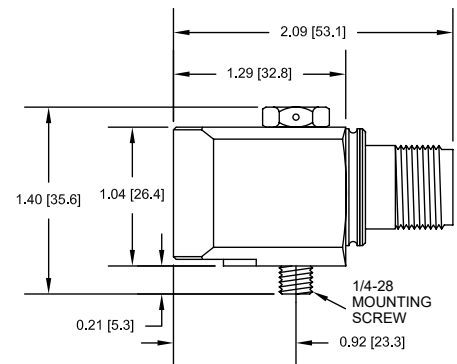

Notes: ¹ Dependent on current supply. BOV, dynamic range and noise may vary.
Accessories supplied: 1/4-28 captive screw (metric mounting available); calibration data (level 2)



Connections	
Function	Connector pin
power/signal	A
common	B
ground	shell

Note: Due to continuous process improvement, specifications are subject to change without notice. This document is cleared for public release.